

Job Name:

System Reference:

Date:

SPECIFICATIONS:**Capacity***

Cooling	Btu/h	24,000
Heating	Btu/h	27,000

* Cooling / Heating capacity indicated at the maximum value at operation under the following conditions:

Cooling | Indoor : 80° F (27° C) DB / 67° F (19° C) WB

Cooling | Outdoor : 95° F (35° C) DB

Heating | Indoor : 70° F (21° C) DB

Heating | Outdoor : 47° F (8° C) DB / 43° F (6° C) WB

Electrical

Electrical Power Requirements	208 / 230V, 1-phase, 60Hz	
Minimum Circuit Ampacity (MCA)	A	0.59 / 0.64 (60Hz)

External Dimensions

Unit (H x W x D) In. (mm)	24-13/16 x 55-17/32 x 8-11/16 (630 x 1,410 x 220)
------------------------------	--

Net Weight

Unit	Lbs.(kg)	89 (40)
------	----------	---------

External Finish	Acrylic painted
-----------------	-----------------

Coil Type	Cross fin (Aluminium fin and copper tube)
-----------	---

Fan

Type x Quantity	Sirocco fan x 2	
Airflow rate (Low-High)	CFM	353 - 494
Motor Type	1-phase induction motor	

Air Filter	Standard filter
------------	-----------------

Refrigerant Piping Diameter

Liquid (High Pressure)	In.(mm)	3/8 (9.52) Flare
Gas (Low Pressure)	In.(mm)	5/8 (15.88) Flare

Field Drain Pipe Size	In.(mm)	I.D. 1 (26)
-----------------------	---------	-------------

Sound Level

Low-High	dB(A)	208/230V	40 - 46
----------	-------	----------	---------

**GENERAL FEATURES:**

- Dual set point functionality
- Compact floor-mount
- Two-speed settings
- Controls can be wall-mounted or unit-mounted in a hidden case


ACCESSORIES:

CN24 Relay Kit (CN24RELAY-KIT-CM3)

Notes:

Model: PFFY-P24NEMU-E- DIMENSIONS

Drw. : IU-W660125
Unit : mm(in)

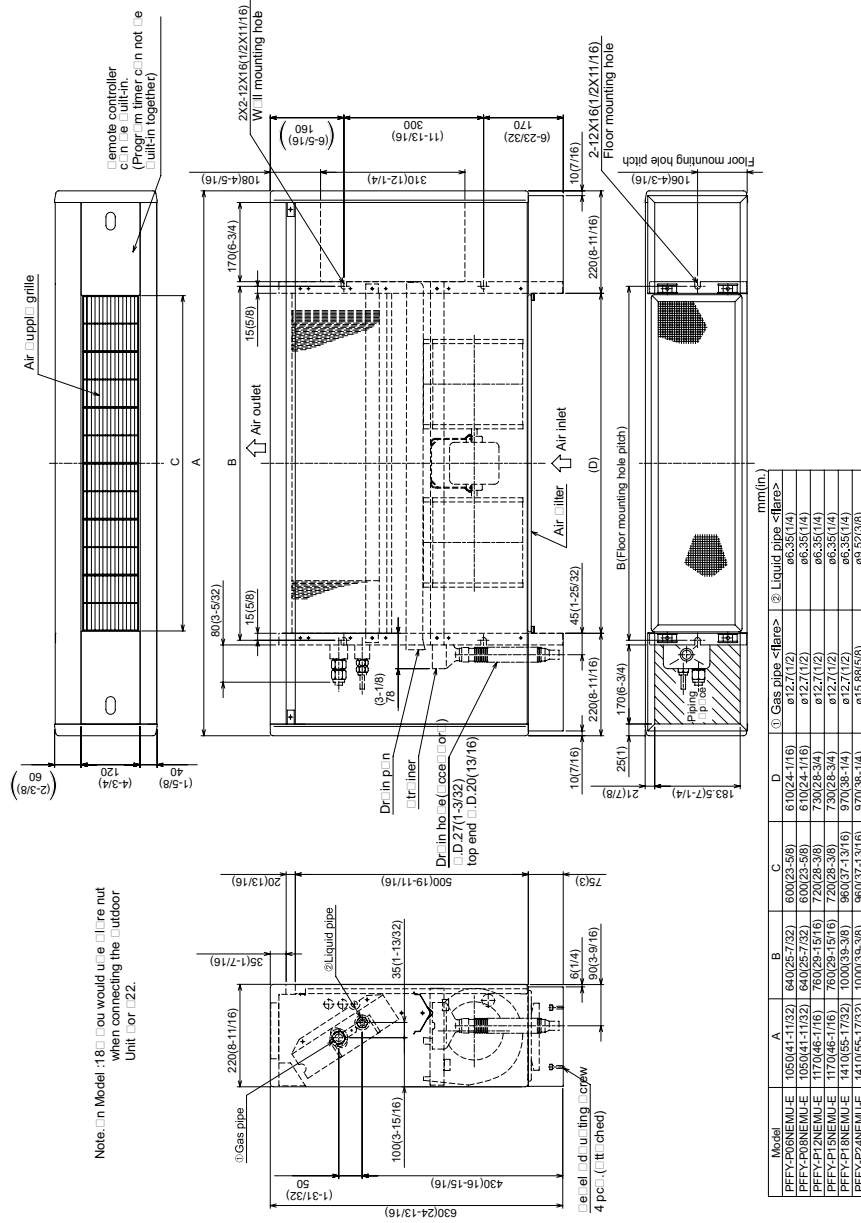

1340 Satellite Boulevard, Suwanee, GA 30024
Toll Free: 800-433-4822 www.mehvac.com



FORM# PFFY-P24NEMU-E-20160304