

Job Name:

Schedule Reference:

Date:



**GENERAL FEATURES**

- Dual set point functionality
- Compact, lightweight, shiny-white, flat-panel design
- Quiet operation
- Multiple fan-speed settings
- Intake grille filter is easily removed for cleaning
- Wireless receiver on board

**OPTIONS**

- Condensate Pump.....SI3100-230
- CN24 Relay Kit.....CN24RELAY-KIT-CM3

**SPECIFICATIONS**

**Capacity\***

Cooling.....12,000 Btu/h  
 Heating.....13,500 Btu/h

**Power**

Power Source.....208 / 230V, 1-phase, 60Hz

**Power Consumption**

Cooling.....0.03 kW  
 Heating.....0.03 kW

**Current**

Cooling.....0.30 A  
 Heating.....0.30 A  
 Minimum Circuit Ampacity (MCA).....0.38 A  
 Maximum Overcurrent Protection (MOCP) Fuse.....15 A

**External Finish**.....Munsell No. 1.0Y9.2/0.2

**External Dimensions**

Inches.....11-5/8 H x 35-3/8 W x 9-13/16 D  
 mm.....295 H x 898 W x 249 D

**Net Weight**

Unit.....29 lbs. / 13 kg

**Coil Type**.....Cross Fin  
 (Aluminum Plate Fin and Copper Tube)

**Fan**

Type x Quantity.....Line Flow Fan x 1  
 Airflow Rate (Low-Mid-High).....320 - 370 - 413 CFM  
 Motor Type.....Direct-drive DC Motor

**Air Filter**.....Polypropylene Honeycomb

**Refrigerant Piping Dimensions**

Liquid (High Pressure).....1/4" / 6.35 mm (Flare)  
 Gas (Low Pressure).....1/2" / 12.7 mm (Flare)

**Drainpipe Dimension**.....I.D. 5/8" / 16 mm

**Sound Pressure Levels**

Low-Mid-High.....34 - 38 - 42 dB(A)




\* Cooling / Heating capacity indicated at the maximum value at operation under the following conditions:  
 Cooling | Indoor: 80° F (27° C) DB / 67° F (19° C) WB, Outdoor 95° F (35° C) DB  
 Heating | Indoor: 70° F (21° C) DB, Outdoor 47° F (8° C) DB / 43° F (6° C) WB

Notes:



# Model: PKFY-P12NHMU-E2 – DIMENSIONS

Unit : in(mm)

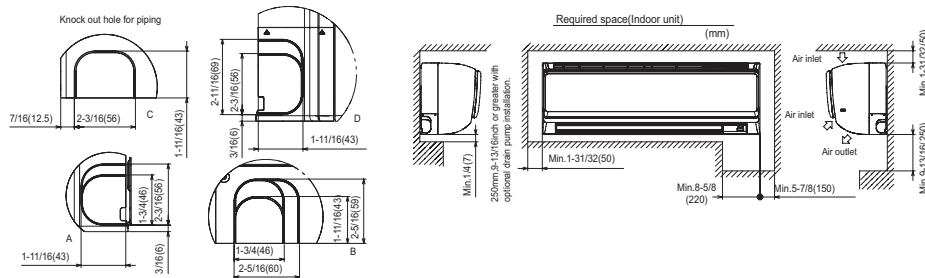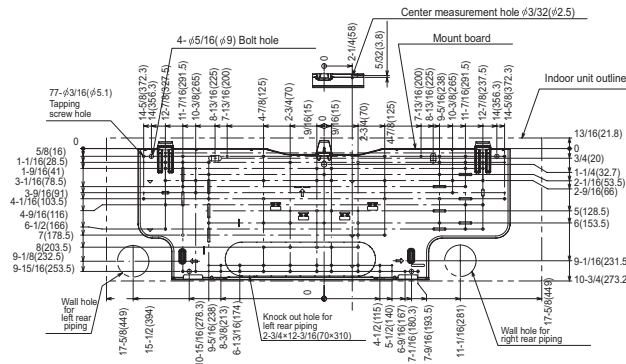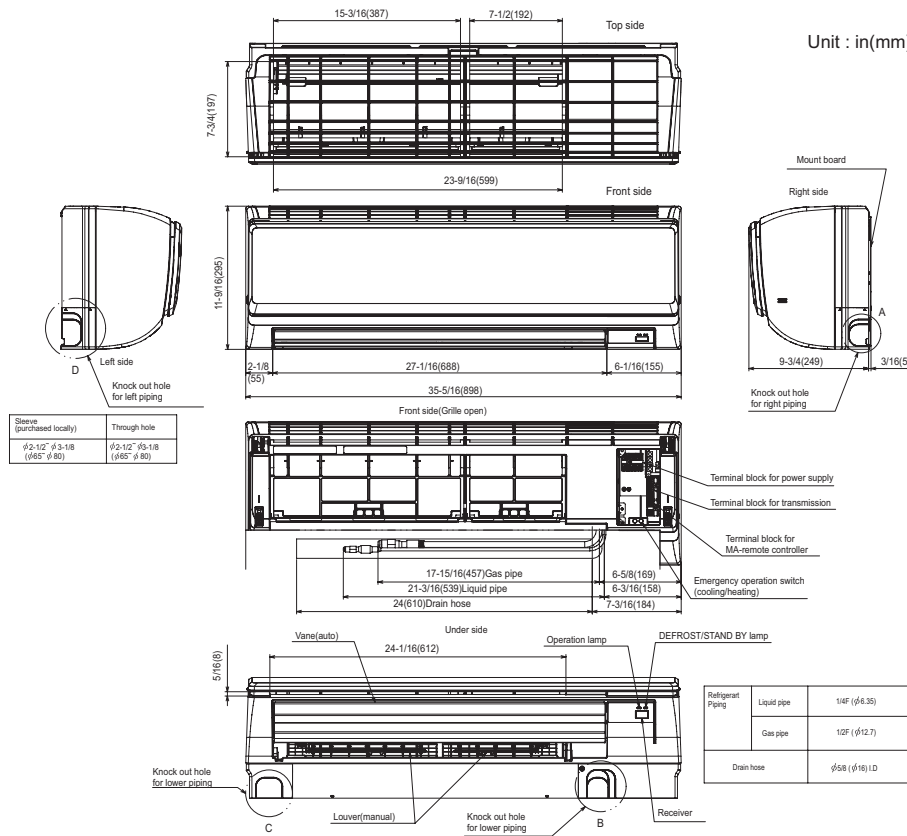

Intertek

FORM# PKFY-P12NHMU-E2 - 201301

Specifications are subject to change without notice.  
© 2012 Mitsubishi Electric & Electronics USA, Inc.



3400 Lawrenceville Suwanee Rd  
Suwanee, GA 30024  
Tele: 678-376-2900 • Fax: 800-889-9904  
Toll Free: 800-433-4822 (#4)  
www.mitsubishipro.com  
Specifications are subject to change without notice.