

Job Name:

System Reference:

Date:



GENERAL FEATURES

- Square edge, sleek design
- 3D turbo fan enabling increased airflow
- Built-in 3D i-see Sensor™*
- Improved installation features*
- Occupancy detection*
- Energy saving features*
- Improved occupant comfort
- Four fan speed settings including auto-fan
- Corner pocket design for simplified installation
- Built-in condensate lift mechanism designed to provide up to 33-7/16" of lift
- Ventilation air intake supported

*Requires a PAR-32MAA-J controller

ACCESSORIES

- Air Outlet Shutter Plate (3 pieces) (PAC-SJ37SP-E)
- High Efficiency Filter (PAC-SH59KF-E)
- Multi Function Casement (PAC-SJ41TM-E)
- Wireless Signal Receiver (PAR-SR3LA-E)
- CN24 Relay Kit (CN24RELAY-KIT-CM3)

SPECIFICATIONS

Capacity*		
Cooling	Btu/h	15,000
Heating	Btu/h	17,000

* Cooling / Heating capacity indicated at the maximum value at operation under the following conditions:

Cooling | Indoor: 80° F (26.7° C) DB / 67° F (19° C) WB; Outdoor 95° F (35° C) DB
Heating | Indoor: 70° F (21.1° C) DB; Outdoor 47° F (8.3° C) DB / 43° F (6° C) WB

Electrical

Electrical Power Requirements	1-phase, 208 / 230V, 60Hz	
Minimum Circuit Ampacity (MCA)	A	0.39
Recommended Fuse Size	A	15

External Dimensions (H x W x D)

Unit	In.(mm)	10-3/16 × 33-3/32 × 33-3/32 (258 × 840 × 840)
Grill (PLP-40EAEU)	In.(mm)	1-9/16 × 37-13/32 × 37-13/32 (40 × 950 × 950)

Net Weight

Unit	Lbs (kg)	46 (21)
Grill (PLP-40EAEU)	Lbs (kg)	11 (5)

External Finish

Unit	Galvanized steel sheet
Grill (PLP-40EAEU)	White - MUNSELL (6.4Y 8.9/0.4)

Coil Type

Cross fin

Fan

Type x Quantity	Turbo fan x 1	
Airflow Rate (Low-Mid2-Mid1-High)	CFM	530 - 547 - 565 - 600
Motor Type	DC motor	
Motor Output	kW	0.05
Motor F.L.A.	A	0.31

Air Filter

PP honeycomb
(long life filter, anti-bacterial type)

Refrigerant Piping Diameter

Liquid (High Pressure)	In.(mm)	1/4 (6.35) Flare
Gas (Low Pressure)	In.(mm)	1/2 (12.7) Flare

Field Drain Pipe Size


In.(mm) O.D. 1-1/4 (32)

Sound Pressure Level

Low-Mid2-Mid1-High	dB(A)	28 - 29 - 30 - 31
--------------------	-------	-------------------


Model: PLFY-EP15NEMU-E – DIMENSIONS

Units: mm (in.)

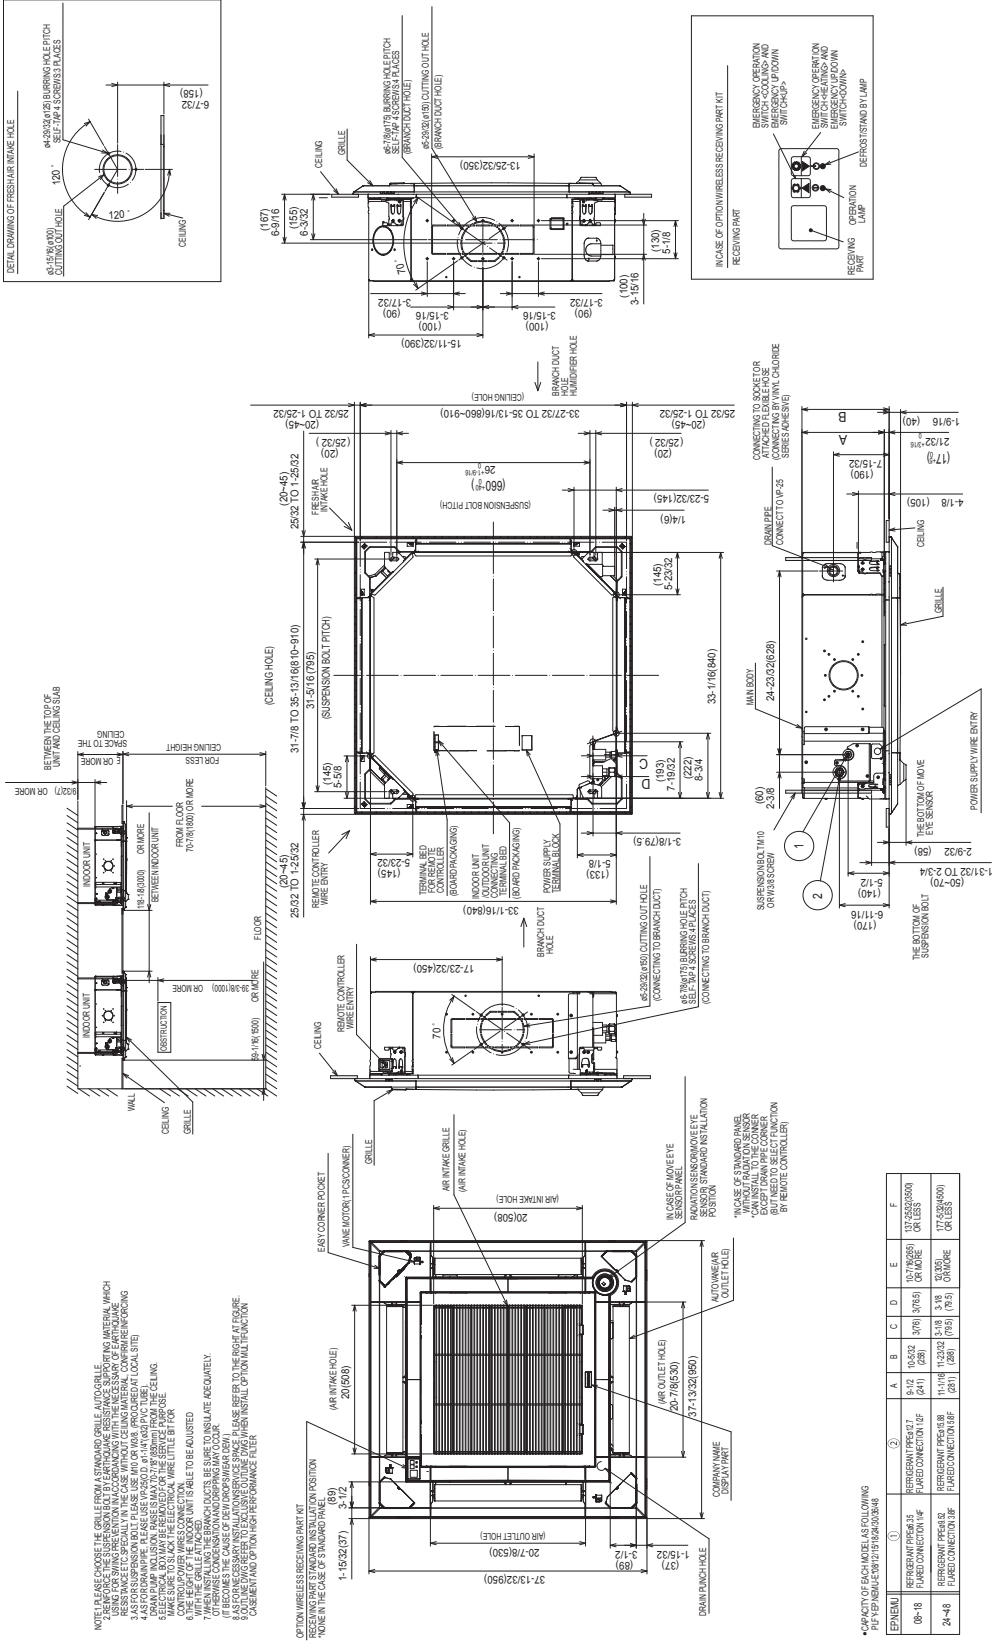

*CAPACITY OF EACH MODEL AS FOLLOWING
 PLFY-EP15NEMU-E (15) 15 (4000) 15 (4000)

EP15MU	(1)	A	B	C	D	E	F
REFRIGERANT PREGAS17 FLUORINATION REF	4.12 (241)	10.503 (252)	3.06 (78)	10.7 (268)	OR MORE	OR MORE	OR MORE
REFRIGERANT PREGAS18 FLUORINATION REF	11.1 (281)	11.232 (283)	3.18 (81)	11.232 (283)	OR MORE	OR MORE	OR MORE

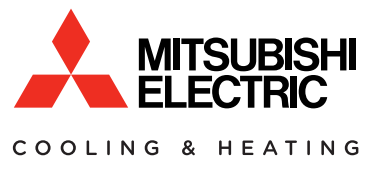

1340 Satellite Boulevard. Suwanee, GA 30024
 Toll Free: 800-433-4822 www.mehvac.com

