

Job Name:

Schedule Reference:

Date:



**GENERAL FEATURES**

- Dual set point functionality
- Multiple fan speed settings
- Auto fan mode
- Built-in condensate lift; lifts to 21-11/16" (550 mm)
- 7-7/8" (200 mm) high for low ceiling heights

**OPTIONS**

- External Heater Adapter.....CN24RELAY-KIT-CM3
- Filter Box (Includes 1" MERV 8 filter).....FBL1-1
- Bottom Return Adapter Plate.....BRP-1

**SPECIFICATIONS**

**Capacity\***  
 Cooling.....12,000 Btu/h  
 Heating.....13,500 Btu/h

**Power**  
 Power Source.....208 / 230V, 1-phase, 60Hz

**Power Consumption**  
 Cooling.....0.07 kW  
 Heating.....0.05 kW

**Current**  
 Cooling (208/230V)..... 0.56 / 0.53A  
 Heating (208/230V)..... 0.46 / 0.43A  
 Minimum Circuit Ampacity (MCA) (208/230V)... 0.68 / 0.74 A  
 Maximum Overcurrent Protection (MOCP) Fuse.....15 A

**External Finish**.....Galvanized Steel Sheets

**External Dimensions**  
 Inches.....7-7/8 h x 31-1/8 w x 27-9/16 d  
 mm.....200 h x 790 w x 700 d

**Net Weight**.....46 lbs. / 20 kg

**Coil Type**.....Cross Fin  
 (Aluminum Fin and Copper Tube)

**Fan**  
 Type x Quantity.....Sirocco Fan x 2  
 Airflow Rate (Low - Mid - High).....211 - 282 - 370 CFM  
 External Static Pressure.....0.02 - 0.06 - 0.14 - 0.20"WG  
 Motor Type.....DC Motor

**Air Filter**.....Polypropylene Honeycomb

**Refrigerant Piping Dimensions**  
 Liquid (High Pressure).....1/4" / 6.35 mm Brazed  
 Gas (Low Pressure).....1/2" / 12.7 mm Brazed

**Drainpipe Dimension**.....O.D. 1-1/4" / 32 mm

**Sound Pressure Levels**  
 Low - Mid - High.....23 - 28 - 35 dB(A)


\* Cooling / Heating capacity indicated at the maximum value at operation under the following conditions:  
 Cooling | Indoor: 80° F (27° C) DB / 67° F (19° C) WB, Outdoor 95° F (35° C) DB  
 Heating | Indoor: 70° F (21° C) DB, Outdoor 47° F (8° C) DB / 43° F (6° C) WB

Notes:



# Model: PEFY-P12NMSU-ER2 – DIMENSIONS

Unit : mm(in)

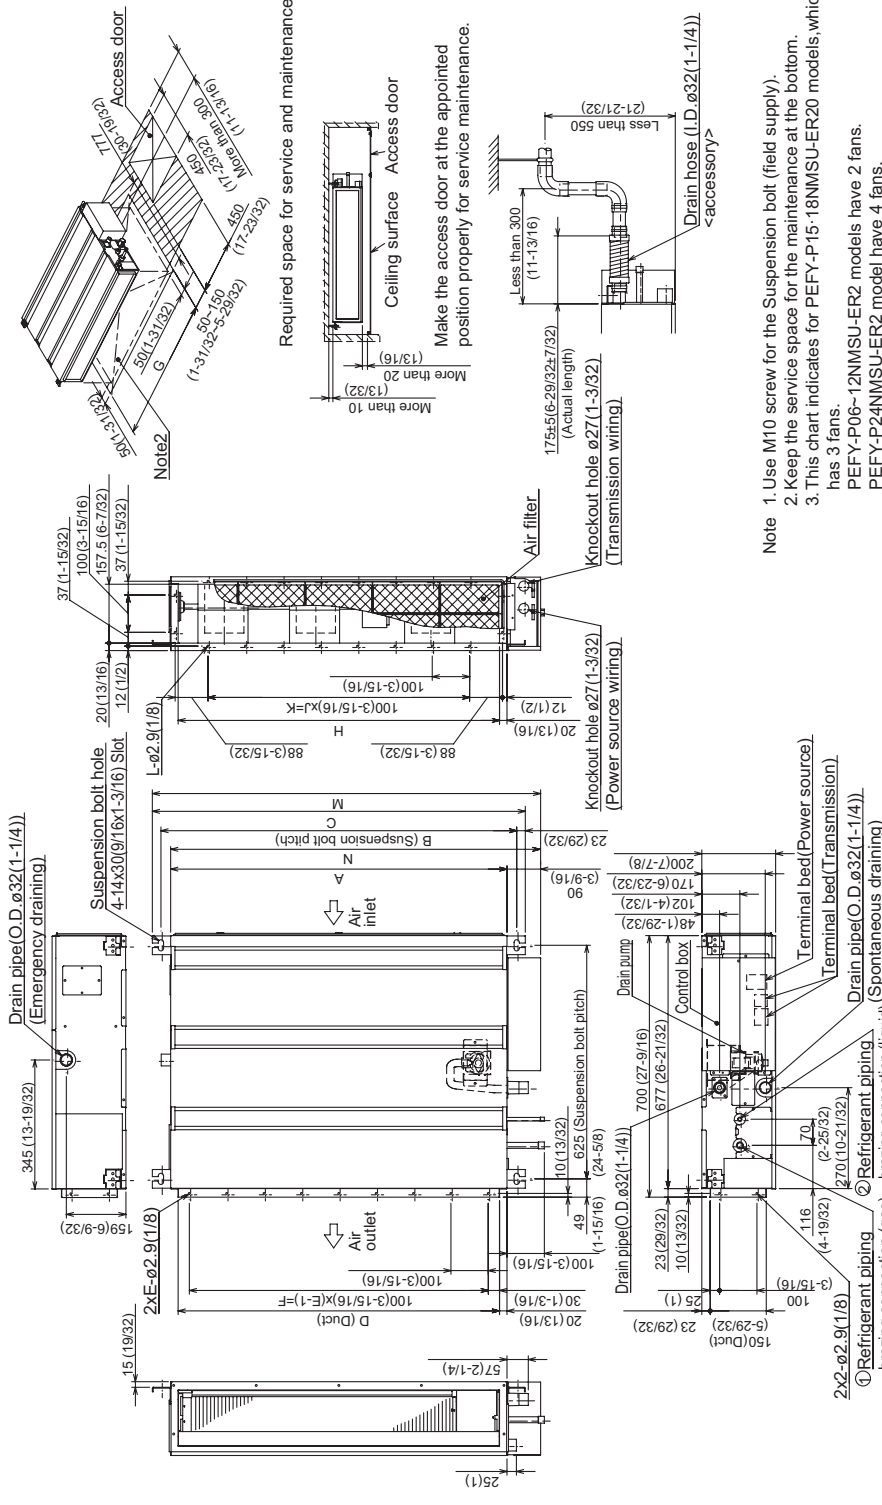

- Note
1. Use M10 screw for the Suspension bolt (field supply).
  2. Keep the service space for the maintenance at the bottom.
  3. This chart indicates for PEFY-P15-18NMSU-ER20 models, which has 3 fans.  
PEFY-P06-12NMSU-ER2 models have 2 fans.  
PEFY-P24NMSU-ER2 model have 4 fans.
  4. In case of the inlet duct is used, remove the air filter (supply with the unit), then install the filter (field supply) at suction side.
- \*1:R410A outdoor unit  
\*2:R22 outdoor unit

Model	A	B	C	D	E	F	G	H	J	K	L	M	N	① Gas pipe	② Liquid pipe
PEFY-P06,08,12NMSU-ER2	700 (27-9/16)	752 (29-5/8)	798 (31-3/8)	660 (25-9/16)	7	600 (23-5/8)	800 (31-1/2)	660 (25-9/16)	5	500 (19-11/16)	16	839 (33-1/8)	790 (31-1/8)	ø12.7(1/2)	ø6.35(1/4)
PEFY-P15NMSU-ER2	900 (35-7/16)	952 (37-1/2)	998 (39-3/16)	860 (33-7/8)	9	800 (31-1/2)	1000 (39-3/8)	860 (33-7/8)	7	700 (27-9/16)	20	1039 (40-9/16)	990 (39)	*1 ø12.7(1/2) *2 ø15.88(5/8)	ø6.35(1/4) ø8.52(3/8)
PEFY-P18NMSU-ER2	1100 (43-3/8)	1152 (45-3/8)	1198 (47-3/16)	1060 (41-3/4)	11	1000 (39-3/8)	1200 (47-1/4)	1060 (41-3/4)	9	900 (35-7/16)	24	1239 (48-13/16)	1190 (46-7/8)	ø15.88(5/8)	ø9.52(3/8)



Intertek

FORM# PEFY-P12NMSU-ER2 - 201208

Specifications are subject to change without notice.  
© 2012 Mitsubishi Electric & Electronics USA, Inc.



COOLING & HEATING  
Live Better

3400 Lawrenceville Suwanee Rd  
Suwanee, GA 30024  
Tele: 678-376-2900 • Fax: 800-889-9904  
Toll Free: 800-433-4822 (#4)  
www.mitsubishipro.com  
Specifications are subject to change without notice.