

Job Name:

System Reference:

Date:

**SPECIFICATIONS:****Capacity\***

Cooling	Btu/h	8,000
Heating	Btu/h	9,000

\* Cooling / Heating capacity indicated at the maximum value at operation under the following conditions:

Cooling | Indoor : 80° F (27° C) DB / 67° F (19° C) WB

Cooling | Outdoor : 95° F (35° C) DB

Heating | Indoor : 70° F (21° C) DB

Heating | Outdoor : 47° F (8° C) DB / 43° F (6° C) WB

**Electrical**

Electrical Power Requirements	208 / 230V, 1-phase, 60Hz	
Minimum Circuit Ampacity (MCA)	A	0.32 / 0.34 (60Hz)

**External Dimensions**

Unit (H x W x D) In. (mm)	24-13/16 x 41-11/32 x 8-11/16 (630 x 1,050 x 220)
------------------------------	--

**Net Weight**

Unit	Lbs.(kg)	67 (30)
------	----------	---------

External Finish	Acrylic painted
-----------------	-----------------

Coil Type	Cross fin (Aluminium fin and copper tube)
-----------	---

**Fan**

Type x Quantity	Sirocco fan x 1	
Airflow rate (Low-High)	CFM	194 - 229
Motor Type	1-phase induction motor	

Air Filter	Standard filter
------------	-----------------

**Refrigerant Piping Diameter**

Liquid (High Pressure)	In.(mm)	1/4 (6.35) Flare
Gas (Low Pressure)	In.(mm)	1/2 (12.70) Flare

Field Drain Pipe Size	In.(mm)	I.D. 1 (26)
-----------------------	---------	-------------

**Sound Level**

Low-High	dB(A)	208/230V	36 - 41
----------	-------	----------	---------

**GENERAL FEATURES:**

- Dual set point functionality
- Compact floor-mount
- Two-speed settings
- Controls can be wall-mounted or unit-mounted in a hidden case


**ACCESSORIES:**

CN24 Relay Kit (CN24RELAY-KIT-CM3)

Notes:

# Model: PFFY-P08NEMU-E- DIMENSIONS


Draw. : IU-W660125  
Unit : mm(in)

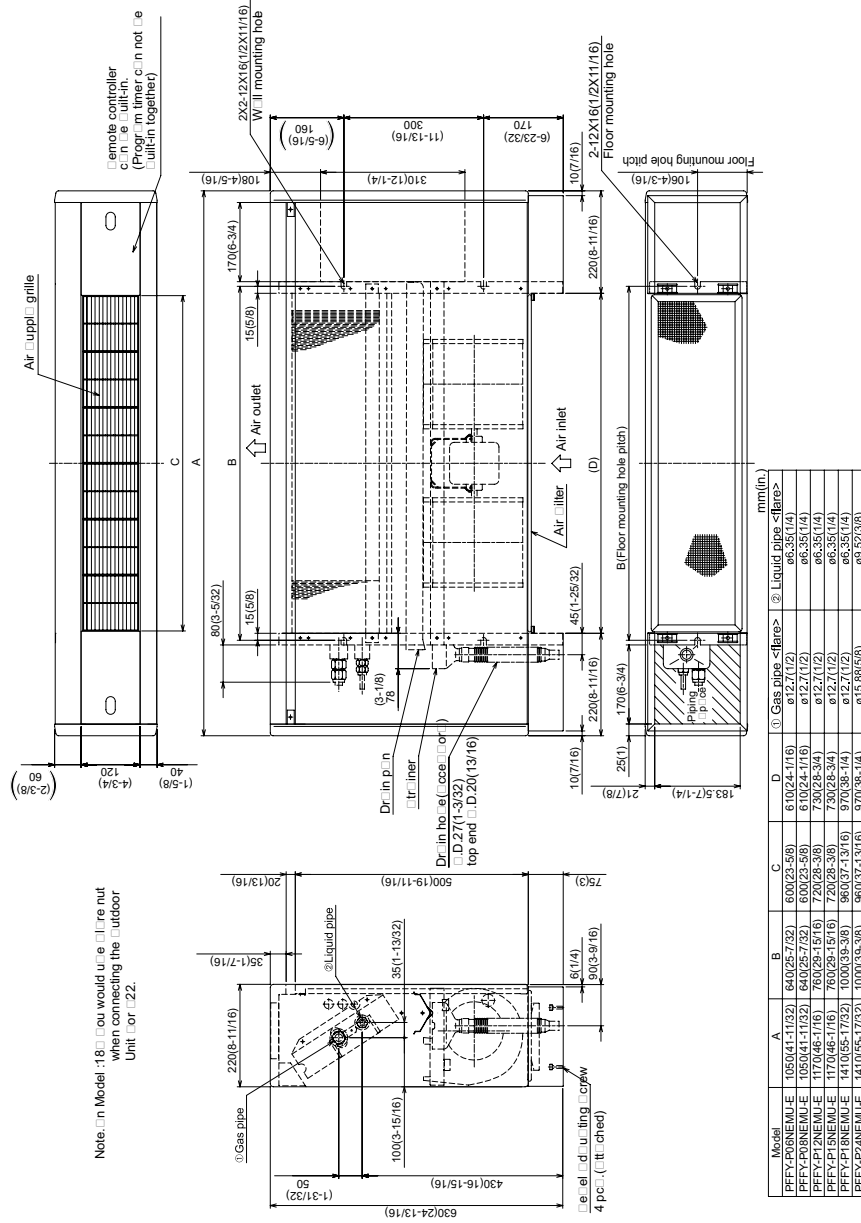

Note: 1. If you would use the nut when connecting the outdoor unit, use the nut.

FORM# PFFY-P08NEMU-E-20160304

Specifications are subject to change without notice.



1340 Satellite Boulevard, Suwanee, GA 30024  
Toll Free: 800-433-4822 www.mehvac.com



© 2016 Mitsubishi Electric US, Inc.