

Job Name:	Date:
System Reference:	



**GENERAL FEATURES**

- Dual set point functionality
- Compact, lightweight, shiny-white, flat-panel design
- Quiet operation
- Multiple fan-speed settings
- Intake grille filter is easily removed for cleaning
- Wireless receiver on board

**OPTIONS**

- Condensate Pump.....SI3100-230
- External Heat Adapter.....PAC-725AD
- CN24 Relay Kit.....CN24RELAY-KIT-CM3

**SPECIFICATIONS**

**Capacity\***

Cooling.....6,000 Btu/h  
 Heating.....6,700 Btu/h

**Power**

Power Source.....208 / 230V, 1-phase, 60Hz

**Power Consumption**

Cooling.....0.03 kW  
 Heating.....0.03 kW

**Current**

Cooling.....0.15 A  
 Heating.....0.15 A  
 Minimum Circuit Ampacity (MCA).....0.19 A  
 Maximum Overcurrent Protection (MOCP) Fuse.....15 A

**External Finish**.....Munsell No. 1.0Y 9.2 / 0.2

**External Dimensions**

Inches.....11-5/8 H x 32-1/8 W x 8-7/8 D  
 mm.....295 H x 815 W x 225 D

**Net Weight**

Unit.....22 lbs. / 10 kg

**Coil Type**.....Cross Fin  
 (Aluminum Plate Fin and Copper Tube)

**Fan**

Type x Quantity.....Line Flow Fan x 1  
 Airflow Rate (Low-Mid1-Mid2-High).....170 - 180 - 200 - 210 CFM  
 Motor Type.....One-phase Induction Motor

**Air Filter**.....Polypropylene Honeycomb

**Refrigerant Piping Dimensions**

Liquid (High Pressure).....1/4" / 6.35 mm (Flare)  
 Gas (Low Pressure).....1/2" / 12.7 mm (Flare)

**Drainpipe Dimension**.....I.D. 5/8" / 16 mm



**Sound Pressure Levels**

Low-Mid1-Mid2-High.....32 - 33 - 35 - 36 dB(A)

\* Cooling / Heating capacity indicated at the maximum value at operation under the following conditions:  
 Cooling | Indoor: 80° F (27° C) DB / 67° F (19° C) WB,  
 Cooling | Indoor: Outdoor 95° F (35° C) DB  
 Heating | Indoor: 70° F (21° C) DB,  
 Heating | Outdoor 47° F (8° C) DB / 43° F (6° C) WB

# Model: PKFY-P06NBMUE2R1 – DIMENSIONS

Unit : in(mm)

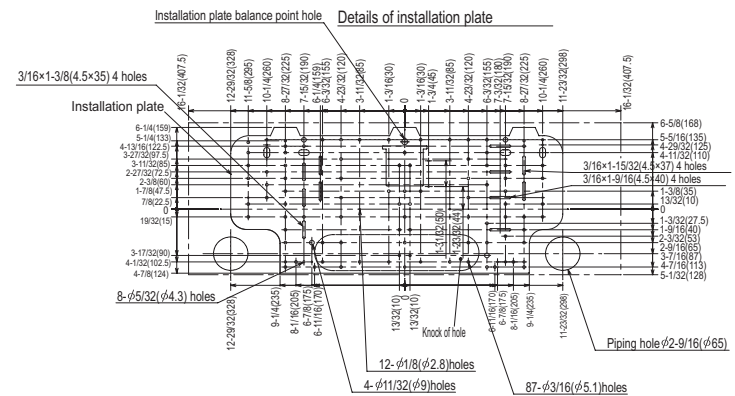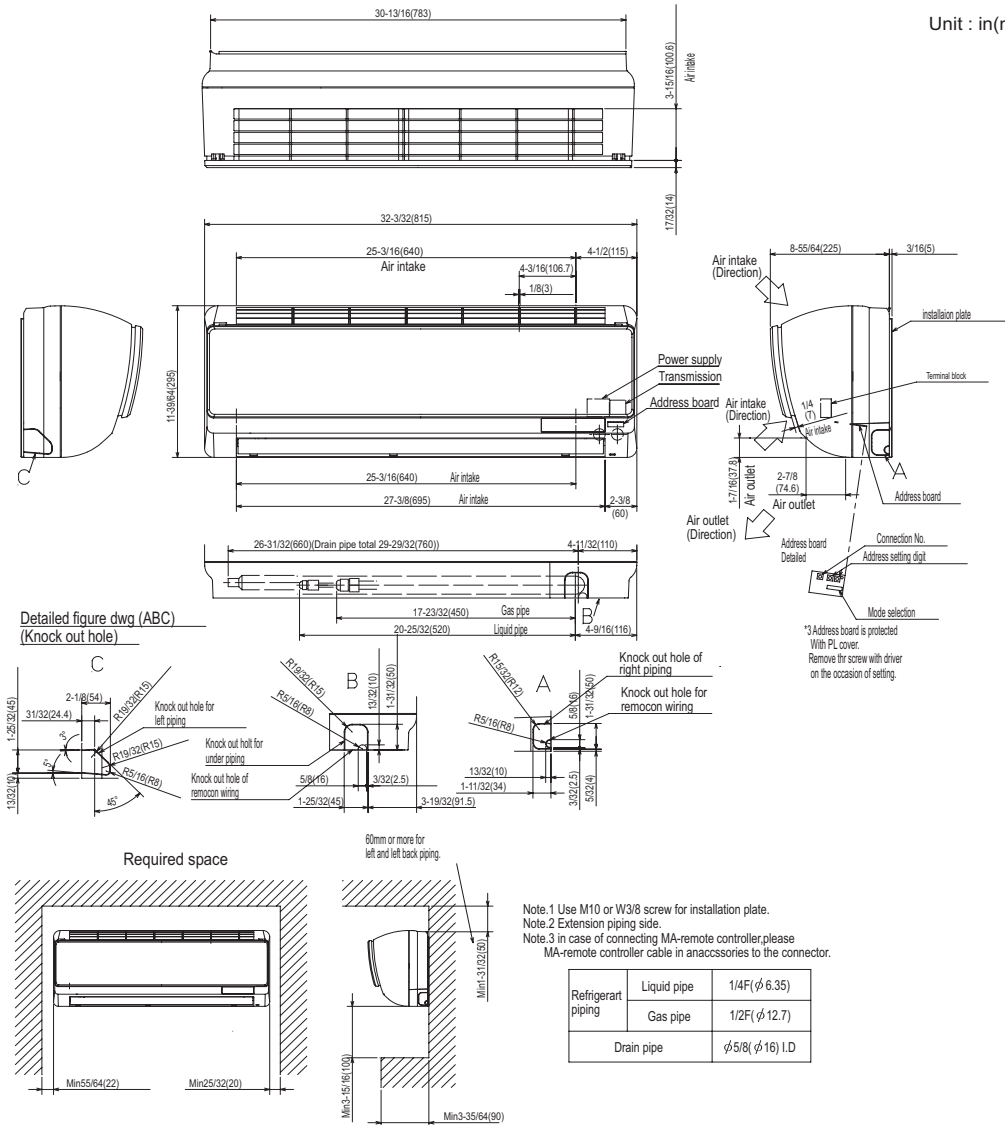

COOLING & HEATING

1340 Satellite Boulevard, Suwanee, GA 30024  
 Toll Free: 800-433-4822 www.mehvac.com

