

## **Submittal Data Sheet**

3.0-Ton DC Ducted Concealed Ceiling FXMQ36PBVJU

## **FEATURES**

- Increased capacity range for increased flexibility
- Improved efficiency with DC fan motor
- Ease of installation with auto adjusting airflow at commissioning based on external static pressure
- Easy maintenance with service access from below
- Installation flexibility with a low profile, compact design at less than 12" in height
- Standard Limited Warranty: 10-year warranty on compressor and all parts

## **BENEFITS**

- Enhanced indoor air quality and LEED ready with MERV 13 filter options
- Flexible ductwork design with ESP capabilities up to 0.54" W.G.
- New economizer control logic
- New configurable auxiliary heater control logic
- Design allows it to be completely concealed perfect for retail, classrooms, offices, banks, restaurants, and hotels.





www.daikinac.com www.daikincomfort.com



Submittal Data Sheet

3.0-Ton DC Ducted Concealed Ceiling FXMQ36PBVJU

PERFORMANCE			
Indoor Unit Model No.	FXMQ36PBVJU	Indoor Unit Name:	3.0-Ton DC Ducted Concealed Ceiling
Туре:	Ducted	Rated Cooling Conditions:	Indoor (°F DB/WB): 80 / 67 Ambient (°F DB/WB): 95 / 75
Rated Cooling Capacity (Btu/hr):	36,000	Rated Heating Conditions:	Indoor (°F DB/WB): 70 / 70 Ambient (°F DB/WB): 47 / 43
Sensible Capacity (Btu/hr):	28,800	Rated Piping Length(ft):	
Cooling Input Power (kW):	0.380	Rated Height Separation (ft):	
Rated Heating Capacity (Btu/hr):	40,000		
Heating Input Power (kW):	0.36		


INDOOR UNIT DETAILS			
Power Supply (V/Hz/Ph):	208-230 / 60 / 1	Airflow Rate (HH/H/M/L) (CFM):	1,130/1,130/953/812
Power Supply Connections:	L1, L2, Ground	Moisture Removal (Gal/hr):	
Min. Circuit Amps MCA (A):	2.90	Gas Pipe Connection (inch):	5/8
Max Overcurrent Protection (MOP) (A):	15.00	Liquid Pipe Connection (inch):	3/8
Dimensions (HxWxD) (in):	11-13/16 x 55-1/8 x 27-9/16	Condensate Connection (inch):	1-1/4
Panel (HxWxD) (in):		Sound Pressure (H/M/L) (dBA):	43/41/39
Net Weight (lb):	102	Sound Power Level (dBA):	
Panel Weight (lb):		Ext. Static Pressure (Rated/Max) (inWg):	0.40 / 0.80

www.daikinac.com www.daikincomfort.com



Submittal Data Sheet 3.0-Ton DC Ducted Concealed Ceiling FXMQ36PBVJU

## **DIMENSIONAL DRAWING**

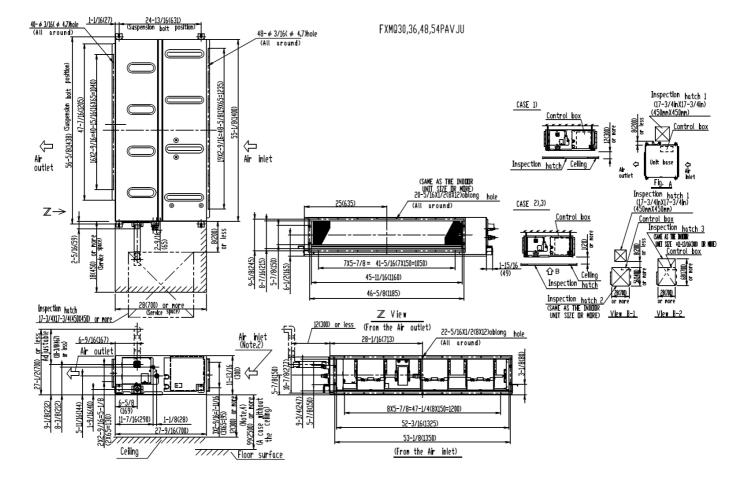

www.daikinac.com www.daikincomfort.com