

Submittal Data Sheet

1.5-Ton Vertical Air Handling Unit FXTQ18PAVJU

FEATURES

- Reduced installation time with integrated Electronic Expansion Valve and Printed Circuit Boards
- Improved application flexibility with the ability to mix and match with other Daikin indoor units on the same system
- Wider application range with dual voltage 208-230V/1ph/60Hz power supply
- Reduced piping cost with smaller piping diameters
- Improved user comfort with 2 selectable fan speeds (H and L)
- Standard Limited Warranty: 10-year warranty on compressor and all parts

BENEFITS

- New fan "Auto" logic allowing the unit to be commissioned where the fan
 operation will cycle on and off with the load
- Ideal replacement for traditional fan coils or vertical stack units
- The ECM fan motor as standard contributes to the increase in energy efficiency, reduction in sound and increased ESP (up to 0.5" W.G.)





www.daikinac.com www.daikincomfort.com



Submittal Data Sheet

1.5-Ton Vertical Air Handling Unit FXTQ18PAVJU

PERFORMANCE			
Indoor Unit Model No.	FXTQ18PAVJU	Indoor Unit Name:	1.5-Ton Vertical Air Handling Unit
Туре:	Ducted	Rated Cooling Conditions:	Indoor (°F DB/WB): 80 / 67 Ambient (°F DB/WB): 95 / 75
Rated Cooling Capacity (Btu/hr):	18,000	Rated Heating Conditions:	Indoor (°F DB/WB): 70 / 70 Ambient (°F DB/WB): 47 / 43
Sensible Capacity (Btu/hr):	11,685	Rated Piping Length(ft):	
Cooling Input Power (kW):	0.170	Rated Height Separation (ft):	
Rated Heating Capacity (Btu/hr):	20,000		
Heating Input Power (kW):	0.17		

INDOOR	LINIT	DETA	11 0
INDOOR	UNIT	DETA	IL O


Power Supply (V/Hz/Ph):	208-230 / 60 / 1	Airflow Rate (H/L) (CFM):	600/420
Power Supply Connections:	L1, L2, Ground	Moisture Removal (Gal/hr):	
Min. Circuit Amps MCA (A):	1.90	Gas Pipe Connection (inch):	1/2
Max Overcurrent Protection (MOP) (A):		Liquid Pipe Connection (inch):	1/4
Dimensions (HxWxD) (in):	46-3/4 x 19-1/2 x 22	Condensate Connection (inch):	3/4
Panel (HxWxD) (in):		Sound Pressure () (dBA):	
Net Weight (lb):	119	Sound Power Level (dBA):	
Panel Weight (lb):		Ext. Static Pressure (Rated/Max) (inWg):	0.50 / 0.50


www.daikinac.com www.daikincomfort.com

DAIKIN Submittal Data Sheet

1.5-Ton Vertical Air Handling Unit FXTQ18PAVJU

DIMENSIONAL DRAWING

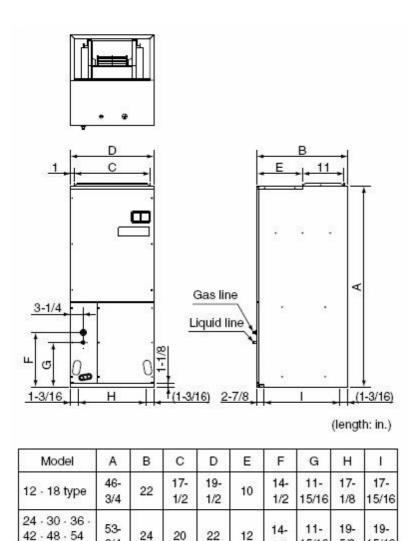

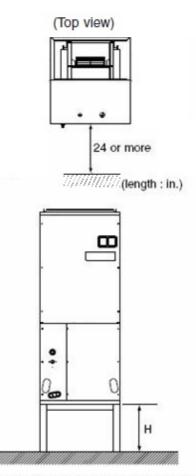

 Ensure sufficient space for the bottom of the product (H dimensions) so that a downward slope of 1/100 can be maintained for drain piping, as described for the intake duct installation and in "6. DRAIN PIPING WORK".

3/4

type

15/16

1/2

5/8

15/16

www.daikinac.com www.daikincomfort.com

(Daikin's products are subject to continuous improvements. Daikin reserves the right to modify product design, specifications and information in this data sheet without notice and without incurring any obligations)