

Submittal Data Sheet

Energy Recovery Ventilator VAM470GVJU

FEATURES

- Superior performance with a high efficiency fan and the capability for use in a wide range of climates (5 to 122°FDB and 80% RH or less)
- Interlocked simultaneous operation with VRV indoor units
- Pre-cooling/heating control function to delay the start of ventilation during air conditioner start-up for higher energy savings
- Unique functions such as independent operation, interlock with other HVAC systems and automatic night purge to reduce cooling loads and increase energy savings
- Standard Limited Warranty: 10-year warranty on compressor and all parts





Daikin City Generated Submittal Data

www.daikinac.com www.daikincomfort.com



Submittal Data Sheet

Energy Recovery Ventilator

VAM470GVJU

PERFORMANCE			
Indoor Unit Model No.	VAM470GVJU	Indoor Unit Name:	Energy Recovery Ventilator
Туре:	Ducted	Rated Cooling Conditions:	Indoor (°F DB/WB): / Ambient (°F DB/WB): 5 / 122
Rated Cooling Capacity (Btu/hr):		Rated Heating Conditions:	Indoor (°F DB/WB): / Ambient (°F DB/WB): 5 / 122
Sensible Capacity (Btu/hr):		Rated Piping Length(ft):	
Cooling Input Power (kW):	0.780	Rated Height Separation (ft):	
Heating Input Power (kW):	0.78		

INDOOR UNIT DETAILS Power Supply (V/Hz/Ph): 208-230 / 60 / 1 Airflow Rate (H/M/L) (CFM): 470/470/390 Power Supply Connections: L1, L2, Ground Moisture Removal (Gal/hr): Min. Circuit Amps MCA (A): 3.90 Gas Pipe Connection (inch): Max Overcurrent Protection (MOP) (A): 15.00 Liquid Pipe Connection (inch): Dimensions (HxWxD) (in): 15-1/4 x 43-11/16 x 32-3/4 Condensate Connection (inch): Panel (HxWxD) (in): Sound Pressure (H/L) (dBA): 42/38 121 Sound Power Level (dBA): Net Weight (lb): 35 Panel Weight (lb): Ext. Static Pressure (Rated/Max) (inWg): 0.73 / 0.73


www.daikinac.com www.daikincomfort.com



Submittal Data Sheet

Energy Recovery Ventilator VAM470GVJU

DIMENSIONAL DRAWING

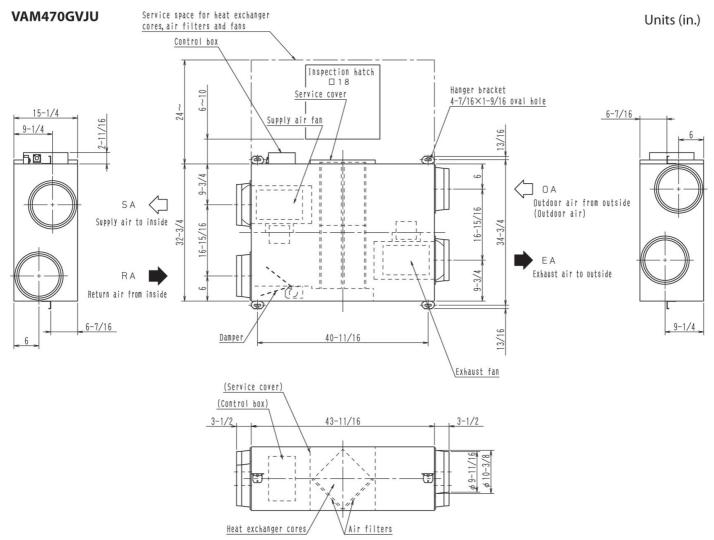

www.daikinac.com www.daikincomfort.com